



Product specification



4 mm Measuring Range

Non-Contacting Displacement Sensor System Series ds821 / Series ds822

Features

- Non-contacting displacement measurement based on the eddy-current principle
- System length: 5 m or 10 m
- Series ds822 with ATEX approval
- Temperature range displacement sensor: -55 °C ... +180 °C
- Frequency: DC ... 10 kHz
- Compact design of the driver housing (oscillator / demodulator)
- One driver for both system lengths: system length detected automatically by the driver
- Reduction of spare parts storage
- Easy assembly due to
 - self-latching push-pull plug connections
 - one mounting adapter for hat-rail or drill-hole mounting
- Excellent precision and temperature stability
- When ordering a complete displacement sensor system, the delivery comes with an acceptance test certificate, including measurement report (factory calibration).

Use



Relative shaft vibration



Eccentricity



Axial shaft position



Speed



Radial shaft position



Reciprocating piston drop

Contents	Page
Features	1
Use	1
Product description	2
Technical data	4
Versions and order codes	7
Approvals	17

Product description


The displacement sensor systems of the ds820 family are based on the non-contacting eddy-current measurement process. The distance is measured between the tip of the displacement sensor and an electrically conductive surface and as a proportional voltage signal send to an electronic monitoring system. In the application range of the machine monitoring, this makes it possible to record the status of rotating shafts.

The eddy-current displacement sensor system consists of the component's displacement sensor with an integrated cable, an optional separate connection cable, and the driver electronics (oscillator/demodulator).

The displacement sensor is available as a forward as well as a reverse-side mountable version.

The eddy-current displacement sensor system is available as series ds821 Standard and ds822 ATEX. Each series is available in system lengths of 5 m and 10 m.

The name of a component is a combination of the series' name (ds821 or ds822 ATEX) and the component designation (**mc** = complete system, **ds** = displacement sensor, **ec** = connection cable or **od** = driver).

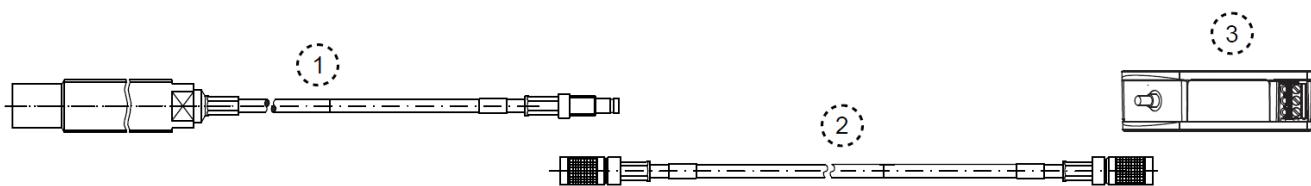

Displacement sensor system

4 mm Series ds821 Standard:

4 mm Series ds822 ATEX:

Complete system (mc)

ds821.mc301

ds822.mc301

① Displacement sensor (**ds**)

ds821.ds300S

ds822.ds300S

② Connection cable (**ec**)

ds821.ec30E

ds822.ec30E

③ Driver (oscillator/demodulator) (**od**)

ds821.od130

ds822.od130

Colour coding

The non-contacting displacement sensor systems series ds821 and ds822 are available with various measuring ranges. Each measuring range is identified by a coloured mark at the end of the integrated cable of the displacement sensor, at the ends of the extension cable and on the driver unit. This makes it easy to identify associated components during installation. The colour codes according to measuring range are as follows:

Colour code	Blue	Red
Measuring range	2 mm	4 mm

4 mm Measuring range

Non-Contacting Displacement Sensor System Series ds821 / Series ds822

EN

Scope of delivery

Depending on the order, the delivery includes the following accessories:

Supplied components	Displacement sensor	Connection cable	Driver	Complete sensor system
Displacement sensor	X			X
Protection cap	X			X
2 nuts ¹	X			X
1 O-ring ²	X			X
Connection cable ³		X		X
Driver			X	X
Assembly adapter			X	X
Acceptance test certificate acc. to DIN EN 10204	X	X	X	X
Measurement protocol (works calibration)				X
User Manual	X	X	X	X

1. **not** available for ds3003 (reverse mount sensor)
2. **only** available for ds3003 (reverse mount sensor), operating temperature range for o-ring -40 °C to +180 °C, for lower temperatures down to -55 °C o-ring (silicone) on request
3. **not** available if the length of the displacement sensor with integrated cable corresponds to the nominal system length of 5 m or 10 m

Technical data

These performance characteristics are valid under the following conditions unless specified otherwise:

+18 °C to +27 °C ambient temperature, -24 VDC supply voltage, 100 kΩ load at signal output, 42CrMo4 B&K Vibro reference material, -10 V Gap Voltage (approx. 2.5 mm measuring distance between sensor and measuring surface), all components are at their operating temperature.

Non-Contacting Displacement Sensor System Series ds821 and Series ds822 ATEX

Measurand	Displacement
Measuring principle	Eddy-current measuring principle
Nominal system lengths	5 m and 10 m
Linear measuring range	4 mm (approx. 0.5 ... 4.5 mm distance from the object to be measured corresponding to an output signal of approx. -2 VDC ... -18 VDC)
Colour code	red

Dynamic characteristics¹:

Sensitivity (ISF)
in regard to B&K Vibro Reference material 42Cr-Mo4 (material no. 1.7225) acc. to DIN 17 200, acc. to AISI/SAE 4140.

Accuracy of the sensitivity (ISF error/%) within temperature range of: 0 °C ... +45 °C (total system) at a nominal system length of 5 m at a nominal system length of 10 m	±5.0% ±7.5%
-35 °C ... +120 °C (displacement sensor) and -35 °C ... +85 °C (driver od130) at a nominal system length of 5 m at a nominal system length of 10 m	±10% ±15%

Deviation from the reference line.
(DSL/µm = Deviation from best fit straight line) the temperature range of:
0 °C ... +45 °C (total system)
at a nominal system length of 5 m
at a nominal system length of 10 m

±50 µm
±100 µm

-35 °C ... +120 °C (displacement sensor) and
-35 °C ... +85 °C (driver od130)
at a nominal system length of 5 m
at a nominal system length of 10 m

±100 µm
±300 µm

Operating frequency range	DC ... 10 kHz (-3 dB damping of the output signal)
---------------------------	--

Electrical characteristics:

 Within the temperature range of -35 °C and -55 °C the stated accuracies of dynamical characteristics further decrease.

Supply voltage (U _B)	-24 VDC (-18 VDC ... -28 VDC)
Output range	0 V ... (U _B +2 V)
Current consumption	max. 12 mA
Output impedance	50 Ω

Mechanical characteristics:

Connector type	Coaxial connector (SAA), push-pull self-latching
Cable:	

Cable type

4 mm Measuring range

Non-Contacting Displacement Sensor System Series ds821 / Series ds822

Cable jacket and colour	FEP, blue
Impedance	95 Ω
Diameter	Ø 3.5 mm (± 0.15 mm)
Altitude	< 2000 m

1. ISF (Incremental Scale Factor), DSL (Deviation from best fit straight line) and temperature ranges according to API 670

Displacement sensor type ds82x.ds300s

Sensor tip:	
Material	Ceramic
Tip diameter	Ø 11 mm (± 0.2 mm)
Sensor housing:	
Material	Stainless steel (material no. 14301 acc. to DIN 17200)
Length including integral cable (measured from the sensor's tip to the end of the integral cable)	0.5 m (-0 m / +0.3 m) 1.0 m (-0 m / +0.3 m) 5.0 m (-0 m / +1.0 m) 10.0 m (-0 m / +1.8 m)
Integrated cable	
Minimum bending radius	35 mm without cable protection 35 mm with steel protective conduit 75 mm with PTFE protective conduit ² 100 mm with corrugated tube protection
Connector	Socket (female) or Plug (male) with nominal system length
Ambient conditions:	
Degree of protection for the tip acc. to EN 60529	IP 68 / 2 h at 10 bar ³
Pressure tightness (expected as based on the design):	
Sensor tip	25 bar
Sensor and corrugated tube protection	25 bar (valid only for ds3002)
Temperature range	
Operating temperature range ⁴	-55 °C ... +180 °C
Storage temperature range ⁵	-20 °C ... + 70 °C

Connection cable type ds82x.ec30x (dependent on system design)

Length	4.0 m (-0 m / +0.8 m) 4.5 m (-0 m / +0.8 m) 9.0 m (-0 m / +1.6 m) 9.5 m (-0 m / +1.6 m)
Minimum bending radius	35 mm without cable protection 35 mm with steel protective conduit 75 mm with PTFE protective conduit ²
Connection	Plug at each end
Ambient conditions	
Operating temperature range ⁴	-55 °C ... +180 °C
Storage temperature range ⁵	-20 °C ... +70 °C

2. The PTFE protective conduit may only be used outside the potentially explosive area or, to prevent static charging, must be fitted with a steel protective conduit or steel tube.

3. When stored or operated at a temperature of less than -30 °C, the protection class is reduced to IP65

4. When used in hazardous areas, the ambient temperatures of the series ds822 ATEX must be observed, see page 17.

5. When stored in original package

Driver ds82x.od130

Electric characteristics	
Supply voltage (U_B)	-24 VDC (-18 VDC ... -28 VDC)
Current consumption	max. 12 mA ($R_L \geq 100 \text{ k}\Omega$)
Power supply	max. 1A and short-circuit proof
Source resistance dynamic	50 Ω

Mechanical characteristics

Housing material	Aluminium alloy (ADC 12)
Dimensions (WxHxD)	26,5 mm x 83 mm x 60 mm
Weight of the driver	approx. 200 g
Connection	Socket (female)

Ambient conditions

Degree of protection according to EN 60529	IP 20
--	-------

Temperature









Operating temperature range ⁶	-55 °C ... +85 °C
Storage temperature range ⁷	-20 °C ... +70 °C
Humidity	98 % non-condensing with protection of the plug connections and cable terminals

6. When used in hazardous areas, the ambient temperatures of the series ds822 ATEX must be observed, see page 17.

7. When stored in original package

Clearances and minimum distances

The clearances and minimum distances specified below must be observed when mounting sensors.

	Sensor tip protruding		Distance to the shaft shoulder, sensor parallel to electrically conductive material
	Sensor tip flush		Required minimum diameter of the shaft for one sensor
	Distance to a shaft end		Required minimum diameter of the shaft with two sensors
	Distance to the shaft shoulder, sensor parallel to electrically conductive material		Parallel arranged sensors

Notes on the diagrams:
All specifications in [mm]


Versions and order codes

Diagrams of sensor types

Design of the displacement sensor type 1 with full-length thread (ds82x.ds3001/ ...)

top down:

- Displacement sensor **without cable protection** (ds82x.ds3001/TT/LLL/UUU/PPP/**000**/R)
- Displacement sensor **with steel protective conduit**, length XX (ds82x.ds3001/TT/LLL/UUU/PPP/**2XX**/R)
- Displacement sensor **with PTFE protective conduit**, length XX (ds82x.ds3001/TT/LLL/UUU/PPP/**3XX**/R)

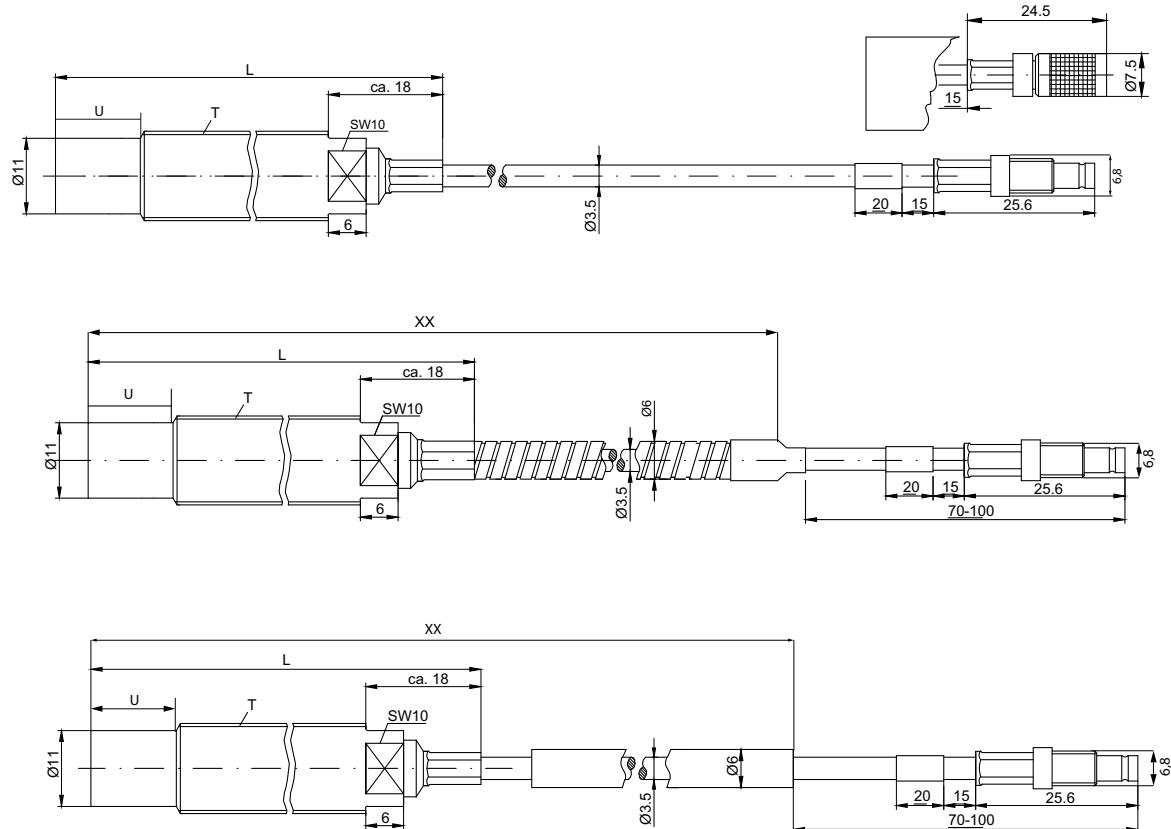



a) Plug (male) for straight connect to driver (nominal system length)

b) Socket (female) for the use of an extra connection cable

Design of the displacement sensor type 2 with full-length thread and corrugated tube (ds82x.ds3002)


top down:

- *Displacement sensor with corrugated tube protection design A, length **XX** (ds82x.ds3002/TT/LLL/UUU/PPP/**4XX/R**)*
- *Displacement sensor with corrugated tube protection design B, length **XX** (ds82x.ds3002/TT/LLL/UUU/PPP/**5XX/R**)*

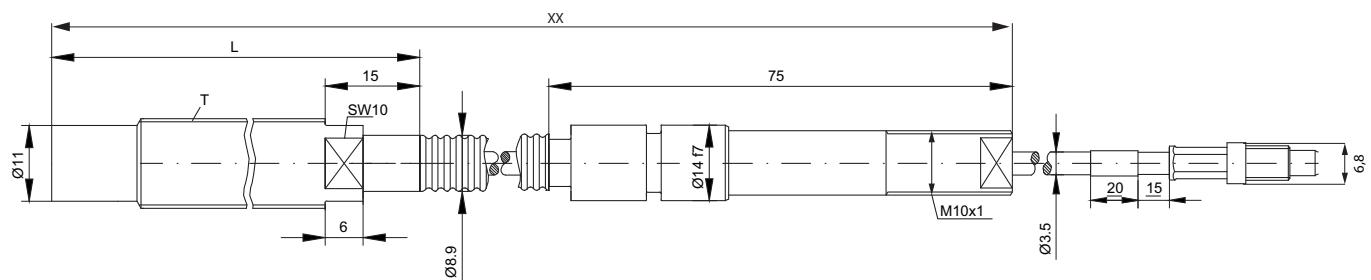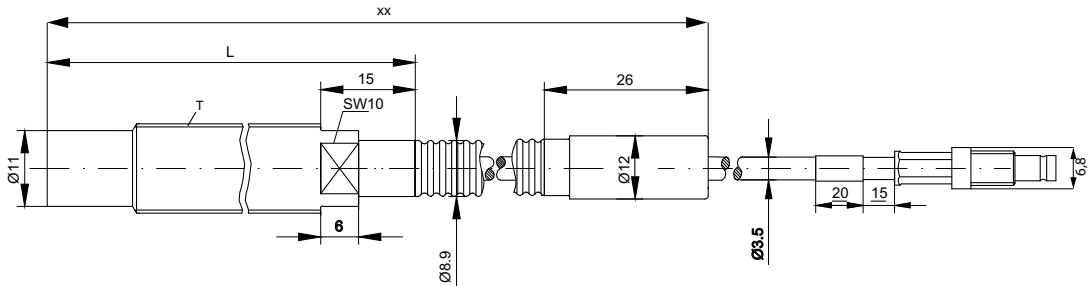

Displacement sensor type 3 for reverse mounted probe (ds82x.ds3003)


- *Displacement sensor for reverse mounting ds82x.ds3003/TT/LL/VV/PP/**000 (no protection)** / R*

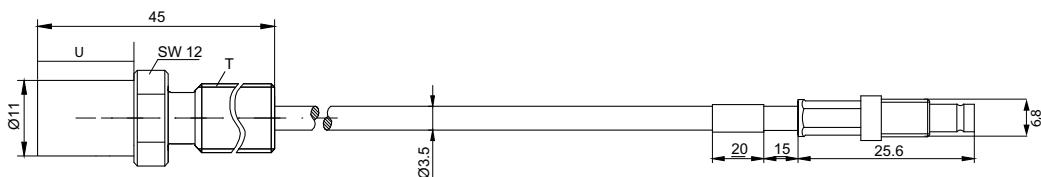

4 mm Measuring range

Non-Contacting Displacement Sensor System Series ds821 / Series ds822

Order code for displacement sensor ds82x.ds300S / TT / LLL / UUU / PPP / CXX / R

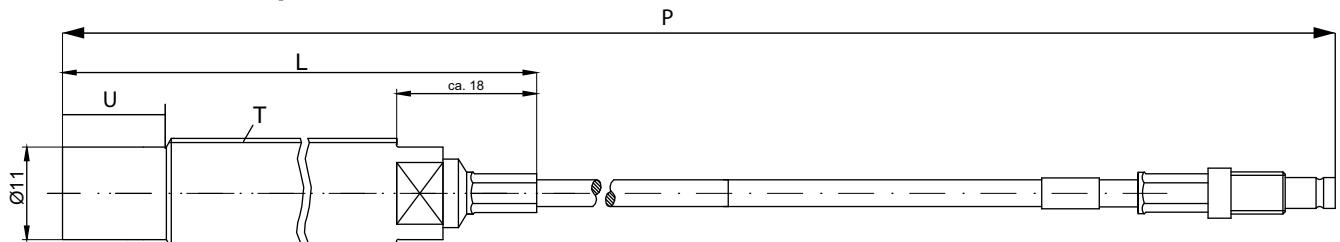

Displacement sensor	ds821	ds822
Standard	●	
ATEX		●



x
1
2

Order code

ds82

Sensor type	ds3001	ds3002	ds3003	S	/ TT	/ LLL	/ UUU	/ PPP	/ CXX	/ R
Full-length thread	●			1						
Full-length thread with corrugated tube		●		2						
Reverse mounted probe			●	3						
Thread					/ TT					
M10 x 1			●		10					
M14 x 1	●	●	●		18					
M14 x 1.5	●	●	●		19					
M16 x 1.5	●	●	●		22					
3/8 – 24 UNF-2A			●		62					
1/2 – 20 UNF-2A	●	●	●		70					
5/8 – 18 UNF-2A	●	●	●		78					
Length of the sensor body					/ TT	/ LLL				
45 mm or 55 mm ¹	●	●	●		10	045 / 055				
60 mm	●	●	●		18	060				
85 mm	●	●	●		19	085				
110 mm	●	●	●		22	110				
135 mm	●	●	●		62	135				
Other lengths min ...max [step size 5 mm]		45...285	45		70	xxx				
Unthreaded section ²					/ TT	/ LLL	/ UUU			
15 mm	●	●	●		18	015				
Other lengths	●	●	●		19	xxx				
Minimum ...maximum [step size 5 mm]		15 ...245	-		22					
Length sensor with integrated cable					/ TT	/ LLL	/ UUU	/ PPP		
0.5 m	●	●	●		10	005				
1.0 m	●	●	●		18	010				
5.0 m	●	●	●		19	050				
10.0 m	●	●	●		22	100				
Cable protection (C) and protection length (X) for the integrated cable ³					/ TT	/ LLL	/ UUU	/ PPP		
No protection	●		●		18	000				
Steel protective conduit	●				19	299 or 2xx				
PTFE protective conduit	●				22	399 or 3xx				
Corrugated tube protective conduit, design A		●			22	499 or 4xx				
Corrugated tube protective conduit, design B		●			22	599 or 5xx				
Special requirements - need to be put in writing					/ TT	/ LLL	/ UUU	/ PPP		
No	●	●	●		18	0				
Yes			upon request		22	1				


1. On M16 x 1.5 or 5/8 - 18 UNF-2A threads, the minimum sensor body length is 55 mm
2. Umax = L - 40 mm, step size 5 mm = '005' order code measured from the sensor tip to the threadless end
3. The first position C defines the type of the cable protection, CXX = 000 stands for no protection. The second and third positions XX specify the length of the protection. XX = 99 is standard setting and specifies the maximum possible protection length for the selected length sensor with integrated cable. The protection ends about 0.2 m before the end of the plug. The protection length is measured from the sensors tip to the end of the protective conduit. The shortest length is 03 = 0.3 m. The step size is 02 = 0.2 m.

For an order, write the number of the selected option in the corresponding boxes on the right. Read from top to bottom, an order code has the following form:

ds82x.ds300x / TT / LLL / UUU / PPP / CXX / R


Order examples ds82x.ds300S:

Series ds821 Standard

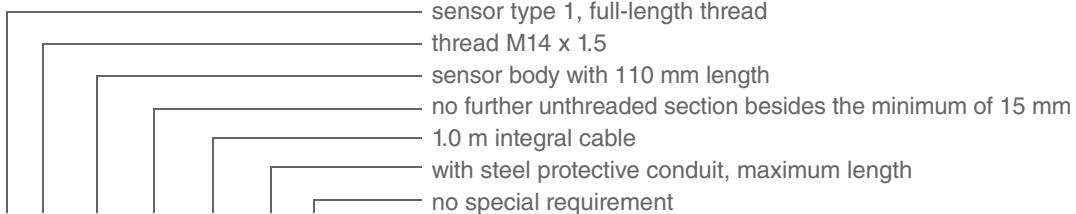

ds821.ds3001/19/110/015/010/299/0

Series ds822 ATEX

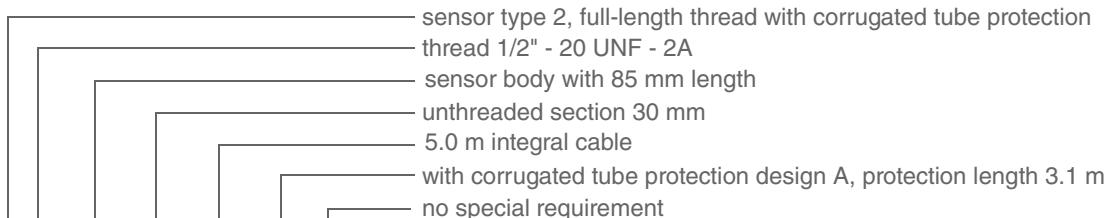

ds822.ds3002/70/085/030/050/431/0

Diagrams of connection cable

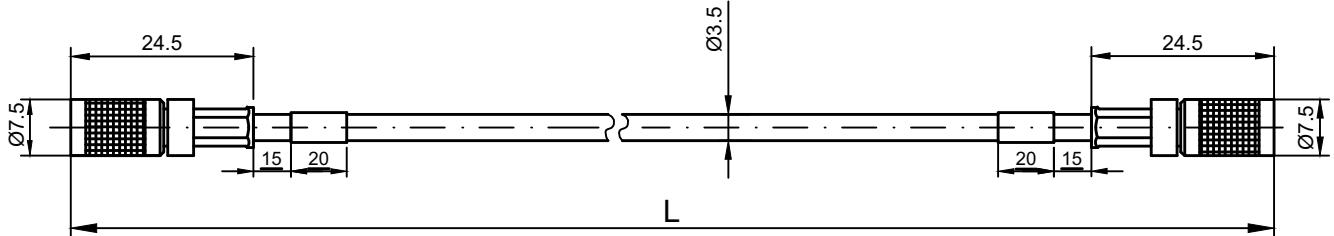


Figure 1 Dimensions of connection cable ds82x.ec300 (no protection)

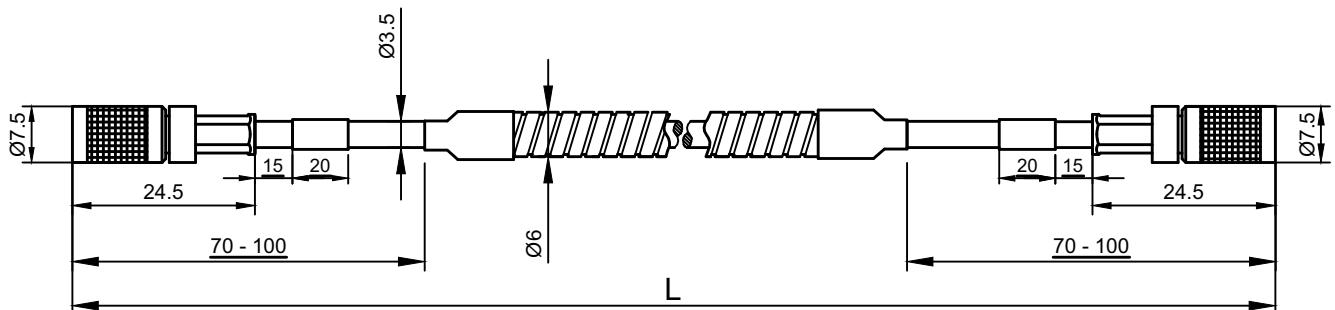


Figure 2 Dimensions of connection cable ds82x.ec302 (steel protection) mechanical reinforcement


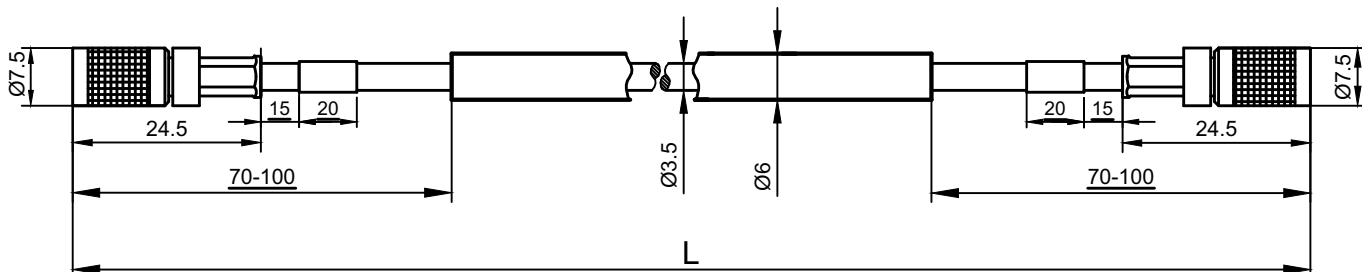


Figure 3 Dimensions of connection cable de82x.ec303 (PTFE tube)

Order code for connection cable ds82x.ec30E / LL / R



connection cable for displacement sensor series	ds821	ds822
Standard	●	
ATEX		●

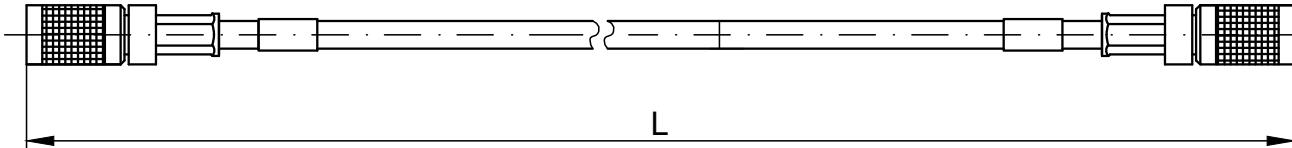

X
1
2

Order code

ds82



Cable protection	ec300	ec302	ec303	E
No protection	●			0
Steel protective conduit		●		2
PTFE protective conduit			●	3
Length of the connection cable				/ LL
4.0 m	●	●	●	40
4.5 m	●	●	●	45
9.0 m	●	●	●	90
9.5 m	●	●	●	95
Special requirements - need to be put in writing				/ R
No	●	●	●	0
Yes	upon request			1

.ec30




For an order, write the number of the selected option in the corresponding boxes on the right. Read from top to bottom, an order code has the following form:

ds82x.ec30E / LL / R

Order examples ds82x.ec30E:

Series ds821 Standard



ds821.ec303/90/0

4 mm Measuring range

Non-Contacting Displacement Sensor System Series ds821 / Series ds822

Diagram of driver

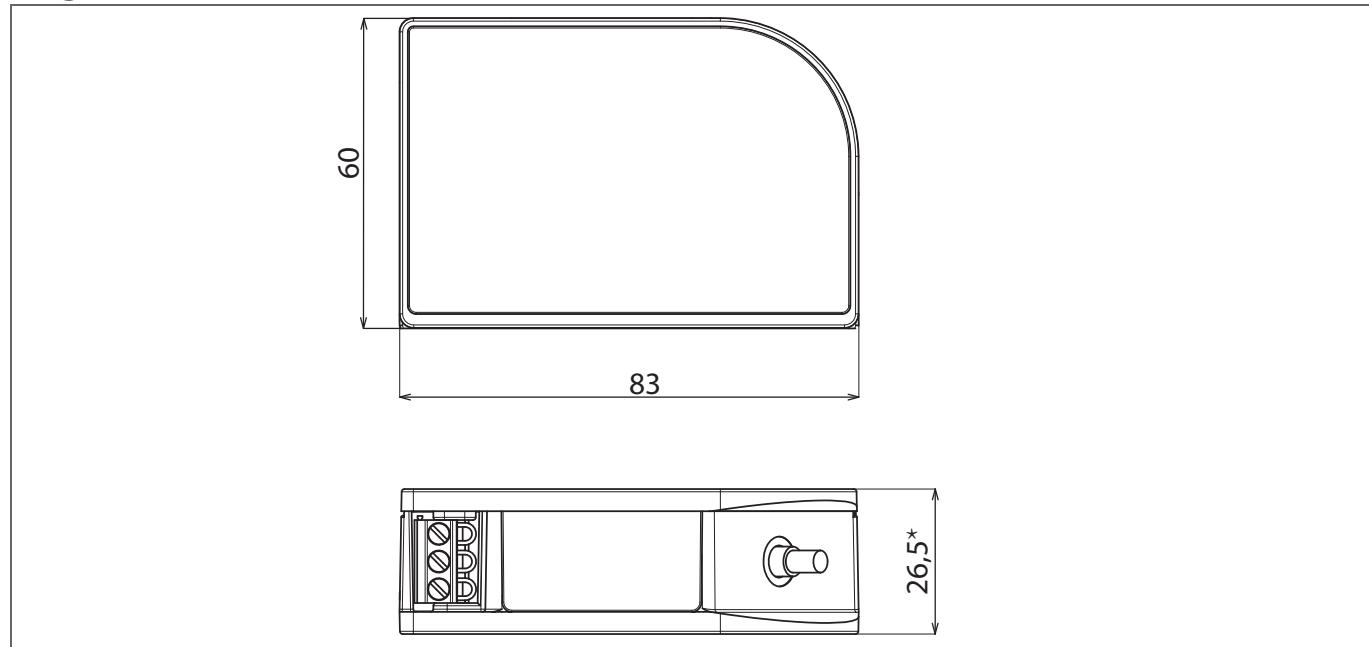


Figure 4 Dimensions of driver (oscillator/demodulator) ds82x.od130

Order code for driver (oscillator/demodulator) **ds82x.od130 / R**

Displacement sensor series	ds821	ds822
Standard	●	
ATEX		●

X
1
2

Order code
ds82  .od130 

Special requirements - need to be put in writing		/ R
No	●	0
Yes	upon request	1

 / 

For an order, write the number of the selected option in the corresponding boxes on the right. Read from top to bottom, an order code has the following form:

ds82x.od130 / R

Order examples ds82x.od130:

Serie ds821 Standard

Standard Sensor
no special requirements

ds821.od130/0

Mounting adapter for hat-rail or drill-hole mounting

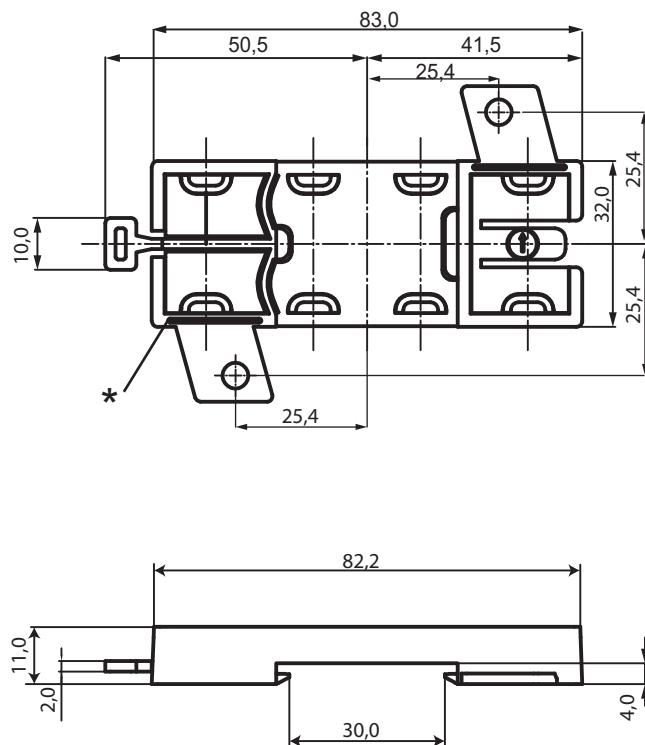


Figure 5 Dimensional diagram of mounting adapter

* Predetermined breaking point for separating the mounting tabs for mounting on hat-rails

The driver (od) can be mounted from both sides on the mounting adapter

4 mm Measuring range


Non-Contacting Displacement Sensor System Series ds821 /  Series ds822

Order code for complete displacement sensor system

ds82x.mc301 / S / TT / LLL / UUU / NN / PP / CXX / E / R

Displacement sensors series	ds821	ds822		X	Order code
Standard	●			1	ds82
ATEX		●		2	.mc301
Sensor type	ds3001	ds3002	ds3003	/ S	
Full-length thread	●			1	
Full-length thread with corrugated tube		●		2	
Reverse mounted probe			●	3	
Thread				/ TT	
M10 x 1			●	10	
M14 x 1	●	●		18	
M14 x 1.5	●	●		19	
M16 x 1.5	●	●		22	
3/8 – 24 UNF-2A			●	62	
1/2 – 20 UNF-2A	●	●		70	
5/8 – 18 UNF-2A	●	●		78	
Length of the sensor body				/ LLL	
45 or 55 ¹ mm	●	●	●	045 / 055	
60 mm	●	●		060	
85 mm	●	●		085	
110 mm	●	●		110	
135 mm	●	●		135	
Other lengths min ... max [step size 5 mm]		45..285		xxx	
Unthreaded section²				/ UUU	
15 mm	●	●	●	015	
Other lengths [in mm]	●	●		XXX	
Other lengths min...max [step size 5 mm]		15..245	15		
Nominal ECDS system length³				/ NN	
5 m	●	●	●	05	
10 m	●	●	●	10	
Length of sensor with integrated cable				/ PP	
Complete nominal system length, no additional connection cable				00	
0.5 m	●	●	●	05	
1.0 m	●	●	●	10	
Cable protection and protection length for the integrated cable⁴				/ CXX	
No protection	●		●	000	
Steel protective conduit	●			2xx	
PTFE protective conduit	●			3xx	
Corrugated tube protective conduit, design		●		4xx	
Corrugated tube protective conduit, design		●		5xx	
E cable protection of connection cable (if available)⁴				/ E	
No protection (ec300)	●	●	●	0	
Steel protective conduit (ec302)	●	●	●	2	
PTFE protective conduit (ec303)	●	●	●	3	
R special requirements - need to be put in writing				/ R	
No	●	●	●	0	
Yes		upon request		1	

1. On M16 x 1.5 and 5/8 - 18 UNF-2A threads, the min. sensor head length is 55 mm
2. Umax = L - 40 mm, step size 5 mm = '005' order code measured from the sensor tip to the threadless end
3. From the sensors tip to the end of the protective conduit. Shortest length: 03 = 3 dm, with step size of 2 dm XX = 00 stands for no protection, XX = 99 is maximum protection length for the selected sensor version (protection ends about 0.2 m before the end of the plug).
4. If there is no connection cable (PP = 00), then enter the value "0".

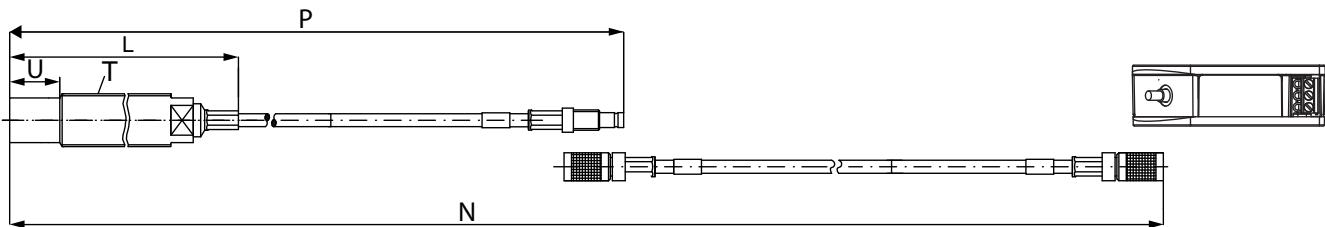

For an order, write the number of the selected option in the corresponding boxes on the right. Read from top to bottom, an order code has the following form:

ds82x.mc301 / S / TT / LLL / UUU / NN / PP / CXX / E / R

Order examples ds82x.mc301:

Series ds821 Standard

ds821.mc301/1/18/110/015/05/10/307/3/0

- sensor type 1, full-length thread
- thread M14 x 1.0
- sensor body with 110 mm length
- no further unthreaded section besides the minimum of 15 mm
- nominal system length 5 m
- 1.0 m integral cable (yielding a 4.0 m connection cable)
- integral cable with PTFE protective conduit, length 0.7 m
- connection cable with PTFE protective conduit
- no special requirement

Series ds822 ATEX

ds822.mc301/3/10/045/015/10/00/307/0/0

- sensor type 3 for reverse mounted probe
- thread M10 x 1.0
- sensor body with 45 mm length
- no further unthreaded section besides the minimum of 15 mm
- nominal system length 10 m
- no additional connection cable (with 10 m integral cable)
- integral cable with PTFE protective conduit, length 0.7 m
- no protection for connection cable, because this cable is not attached
- no special requirement

Remark:

The length of the possible connection cable is derived automatically from the length of the integral cable and the nominal system length. The delivery contents of a complete measuring system always include a driver of the corresponding series.

4 mm Measuring range

Non-Contacting Displacement Sensor System Series ds821 /  Series ds822

EN

Approvals

Displacement sensor systems of the series ds822 and series ds821 are:

CE compliant acc. to EMC Directive and



RCM for Australia and New Zealand



Displacement sensor system series ds822 ATEX is additionally approved for:

use in hazardous Ex-area according 2014/34/EU.



EC type examination certificate PTB 12 ATEX 2011 designation

 II 1/2 G Ex ia IIC T6...T1 Ga/Gb or  II 2G Ex ia IIC T6...T1 Gb

 II 2 D Ex ia IIIC T168 °C Db

in compliance with EN 60079-0:2012+A13, and EN 60079-11:2012, EN 60079-26:2015.

IECEx certificate: IECEx PTB 13.0010 mark
Ex ia IIC T6...T1Ga/Gb or Ex ia IIC T6...T1 Gb
Ex ia IIIC T168 °C Db

Voltage supply: type of protection Intrinsic Safety EX ia IIC only for connection to a certified intrinsically safe circuit

Maximum values:

$U_i = 28 \text{ V}$
 $I_i = 140 \text{ mA}$
 $P_i = 840 \text{ mW}$

$L_i = \text{negligibly low}$
 $C_i = 12 \text{ nF}$

In Compliance with

TR-TS 012/2011 (TP-TC 012/2011)



EAC Ex Certificate:

RU-C-DE.AA87.B.00334

Ga/Gb Ex ia IIC T6...T1 X or

1Ex ia IIC T6...T1 Gb X
Ex ia IIIC T 168°C Db

Ambient temperature range

Category 1/2 equipment

Temperature class	Permissible ambient temperature range category 1/2-G-equipment		Permissible surface temperature category 2-D-equipment	
	Sensor / Connection cable	Oscillator	Sensor / Connection cable	Oscillator
T6	-55 °C ... +53 °C	-55 °C ... +61 °C	+71 °C	+91 °C
T5	-55 °C ... +65 °C	-55 °C ... +76 °C	+83 °C	+106 °C
T4	-55 °C ... +93 °C	-55 °C ... +79 °C	+111 °C	+109 °C
T3	-55 °C ... +145 °C	-55 °C ... +79 °C	+163 °C	+109 °C
T2, T1	-55 °C ... +150 °C	-55 °C ... +79 °C	+168 °C	+109 °C

Category 2 equipment

Temperature class	Permissible ambient temperature range category 2-G-equipment		Permissible surface temperature category 2-D-equipment	
	Sensor / Connection cable	Oscillator	Sensor / Connection cable	Oscillator
T6	-55 °C ... +67 °C	-55 °C ... +61 °C	+85 °C	+91 °C
T5	-55 °C ... +82 °C	-55 °C ... +76 °C	+100 °C	+106 °C
T4	-55 °C ... +117 °C	-55 °C ... +79 °C	+135 °C	+109 °C
T3, T2, T1	-55 °C ... +150 °C	-55 °C ... +79 °C	+168 °C	+109 °C

Brüel & Kjær Vibro GmbH
 Leydheckerstraße 10
 64293 Darmstadt
 Germany

Tel.: +49 6151 428 0
 Fax: +49 6151 428 1000
 info@bkvibro.com

© Brüel & Kjær Vibro GmbH / 4 mm Series ds82x / 9.2020 / Technical specifications subject to change / BPS0135-EN-20